

# CDM-SA/T

## CDM-SA/T 150W/942 1CT/12



With a high luminous efficacy producing more lumens per watt than standard Architectainment lamps, the CDM-SA/T is the greener alternative to light up the night. In addition, the optimal lamp filling and short arc of the lamp create a high beam intensity and excellent color rendering.

### Product data

#### • General Information

Cap-Base	G12 [ G12]
Operating Position	UNIVERSAL [ Any or Universal (U)]
Main Application	Dynamic Architectural
Life To 50% Failures (Nom)	9000 h

#### • Light Technical

Color Code	942 [ CCT of 4200K]
Luminous Flux (Min)	12600 lm
Luminous Flux (Nom)	14000 lm
Color Designation	Cool White (CW)
Chromaticity Coordinate X (Nom)	380
Chromaticity Coordinate Y (Nom)	360
Correlated Color Temperature (Nom)	4200 K
Luminous Efficacy (rated) (Nom)	91 lm/W
Color Rendering Index (Nom)	95

#### • Operating and Electrical

Power (Rated) (Nom)	150 W
Lamp Current (Nom)	1.8 A
Ignition Supply Voltage (Min)	198 V

#### • Controls and Dimming

Dimmable	No
----------	----

#### • Approval and Application

Mercury (Hg) Content (Max)	11.9 mg
----------------------------	---------

#### • Luminaire Design Requirements

Bulb Temperature (Max)	650 °C
Pinch Temperature (Max)	350 °C

#### • Product Data

Full product code	871150020094515
Order product name	CDM-SA/T 150W/942 1CT/12
EAN/UPC - Product	8711500200945
Order code	928086605103
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928086605103
Net Weight (Piece)	0.030 kg


# PHILIPS

## Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and

remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


## Dimensional drawing

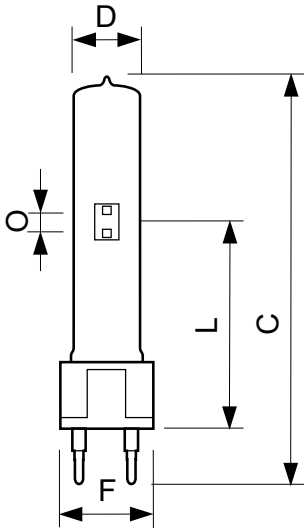



CDM-SA/T G12

## CDM-SA/T 150W/942

Product	D	O	L	L	L	C	F	F	F
CDM-SA/T 150W/942 1CT/12	20 mm	6 mm	55 mm	57 mm	56 mm	110 mm	31 mm	30 mm	29 mm



## Photometric data

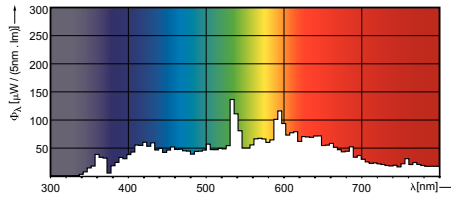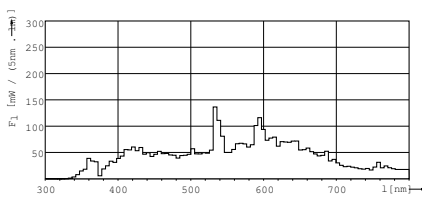



© 2015 Philips Lighting Holding B.V.  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2015, December 23  
data subject to change