



CPX 4120B-II is an outdoor pixel controlled RGBW LED wash bar. It is brighter and with a better color mixing from its precedent. With 12 high performance LEDs that can be controlled individually and fast lock seamless installation, this IP65 bar is also a great pixel mapping show LED bar for any theatre and stage application in addition of outdoor architectural application.

SOURCE Light source: 12 x 15 watts 4 in 1 RGBW LEDs
LED life expectancy: 50,000 Hrs.

OPTICAL SYSTEM Beam angle: 45° x 15°
Light output: 3,899 Lux @ 2m @ 45°
Lumen output: 10,000 Lm

DYNAMIC EFFECTS Dimmer: Linear adjustment
Color mixing: RGBW
Strobe and Fade effect
Built-in color and dynamic macros




CONTROL & PROGRAMMING Control protocols: DMX, RDM
Control channels: 3, 4, 5, 8, 10, 48, 51 CHs

ELECTRICAL Input voltage: 100-240V/50-60Hz
Power consumption: 200 watts

CONNECTIONS DMX connections: IP DMX In/Out 3 pin connectors
Power connections: IP power In/Out connectors

PHYSICAL Dimensions: 1017 x 140 x 215.3mm
Net weight: 9.1 Kg
Color: Black
Housing: Die cast and extruded aluminum
IP rating: 65
Operating temperature: -20°C/45°C

Dimensions

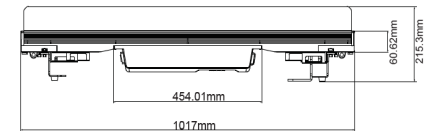

Luminous Diagram

1m	12600, 155971 x	16.22cm
2m	3150, 38991 x	32.44cm
3m	1400, 17331 x	48.67cm
4m	787.5, 974.81 x	64.89cm
5m	504.0, 623.91 x	81.11cm
6m	350.0, 433.21 x	97.33cm
7m	257.2, 318.31 x	113.55cm
8m	196.9, 243.71 x	129.78cm
9m	155.6, 192.61 x	146.00cm
10m	126.0, 156.01 x	162.22cm

