

Description

K-array presents its new full-range speaker line, Domino. These stainless steel compact speakers with plug and play capabilities do not require presets and can be driven by any amplifier making them the perfect solution for applications from intimate restaurants to live concert settings. The new line consists of three speakers: the KF26, the KF210 and the KF212.

The largest and most powerful of the Domino line is the KF212. Comprised of a 12" coaxial transducer with a titanium dome and a 12" passive radiator, the KF212 really packs a punch. With a depth of just 20 cm, the KF212 is the ideal solution for clubs and lounges up to live concerts.

The Domino line is accompanied by several product-specific accessories that can enhance the system's setup. Wall brackets are included while other useful tools are available for purchase.

Domino is available in a 24 K gold plated finish as well as brushed or polished stainless steel finishes in addition to the standard sleek black and elegant white rendering them suitable for any venue.

All KF212 components are designed by the K-array R&D department and custom-made under the K-array quality control system.

Colors		Premium Finishes		Features		Frequent Applications	
Black		Gold		Full Range	Compatible with Any Amplifier	Cinemas	Clubs and Lounges
White		Polished		Visually Discreet	Weather Resistent	Fitness and Wellness	Theaters
RAL		Brushed				Hotels and Resorts	Theme Parks

Accessories			
K-WALL2	K-2SPK	K-FLY2B	K-KCLAMP/S
K-FLY22	K-KUIP12	K-JOINT2B	K-KCLAMP

Technical Specifications

General	
Type	Point source
Transducers	Coaxial 12" woofer / 1.7" compression driver 12" passive radiator
Frequency Response ¹	40 Hz – 19 kHz (-6 dB)
Max SPL ²	130 dB (peak)
Rated Power	700 W
Coverage	V. 60° H. 90°
Connectors	4PIN euroblock connector (included)
Nominal Impedance	8 Ω

Handling & Finishes	
Dimensions (WxHxD)	330 x 655 x 200 mm (13.0 x 25.8 x 7.9 in) ³
Weight	23.5 kg (51.8 lb)
Material	Stainless Steel
Colors	Black, White, Custom RAL
Finishes	Gold, Polished, Brushed

Regulations	
IP Rating	IP43 ⁴


Accessories	
Recommended Amplifier	Kommander-KA84
Accessories	K-2SPK, K-KUIP12, K-WALL2, K-FLY22, K-FLY2B, K-JOINT2B, K-KCLAMP, K-KCLAMP/S

¹ With dedicated preset

² Maximum SPL is calculated using a signal with crest factor 4 (12dB) measured at 1 m

³ Removable rubber feet not included in measures

⁴ More complete water protection with K-KUIP12 accessory

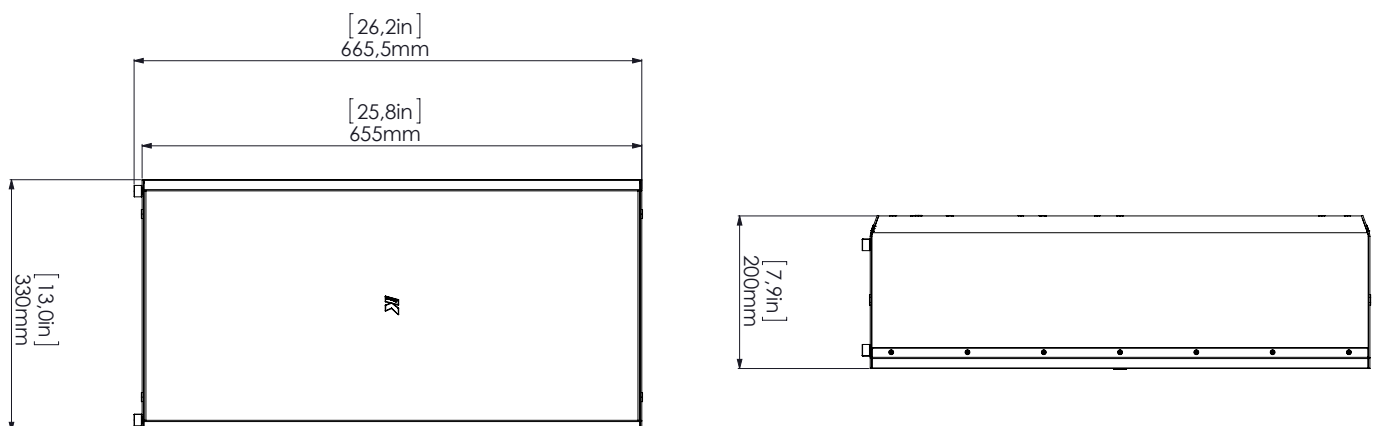

Notes for data:

New materials and designs are introduced into existing products without previous notice.

Present systems may differ in some respects from those presented in this catalog.

