

# VISIOTEK

LED SCREENS

## VT-P390-OD

### P3.91 Outdoor LED Screen

#### Module

Pitch: 3.91 mm  
Pixel configuration: SMD 3 in 1  
Size (mm): W: 250 , H: 250  
Resolution (dot): W:64 ,H:64  
Pixels: 4096 dots



#### Cabinet

Size (mm): 500 x 500  
Thickness (mm): 75  
Resolution (dot): 128 x 128  
Module Quantity: 4 pcs  
Pixel Density: 16384 dots/m<sup>2</sup>  
Weight: ≤ 8 Kg  
Material: Die-casting Aluminum

#### Technical Index

Brightness : 4000-5000cd/m<sup>2</sup>  
View Angle: Horizontal: 140°, Vertical: 140°  
Optimal Viewing Distance: ≥ 4 m  
Refresh Rate: ≥3840Hz  
Frame Frequency: 50 - 60 Hz  
Power consumption(max/avg) : 800/250 W/m<sup>2</sup>  
Input Voltage : AC220V/50Hz-60Hz  
MTBF : >5000 h  
Life Span: ≥100000 h  
Temperature-operating : -30°C ~ 60°C  
Humidity-operating : 10% ~ 95%

## Front and Rear Accessible Module




## Any Module can be used at any position



## Single Push Backdoor Lock

Tool Free PSU Exchange

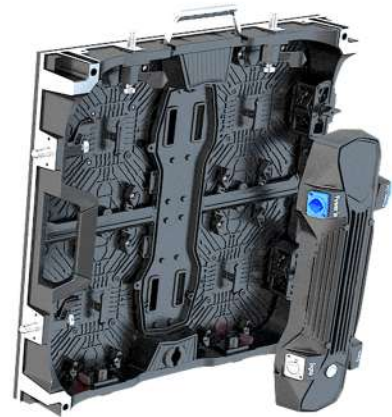

## Vertical & Horizontal Splicing

