




## Power Container Xtreme Outdoor CPC32-C1-H2- CB

1x CEE32A IN- 2x E16 Multipin OUT - 1x cPot OUT -  
Circuit breakers

Power Container is a highly reliable, rugged and first level powerful distribution solution. The Power Container allows reduction of cabling effort & cost, circuit protection and power measurement. It is ideally suited for demanding mobile applications esp. video walls, lighting, and others.

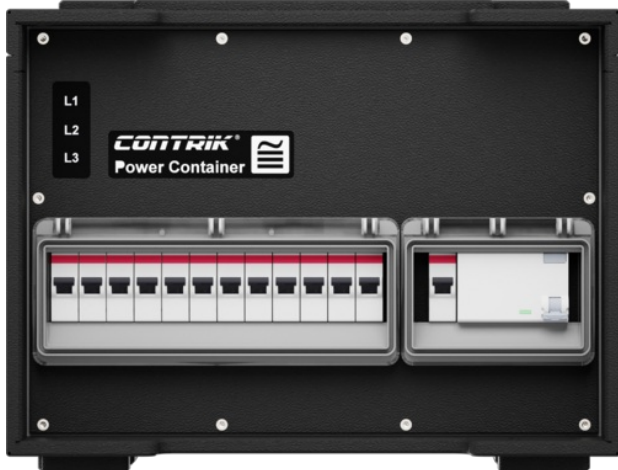

## Features & Benefits

- **High durability & protection:** rugged Easylen® housing with high IK, IP44 with CEE / cPot in mated condition, self-closing caps, connector protection, flame retardant & non-conductive housing material
- **Easy transport & handling:** compact, stackable, fully lockable, integrated handles
- **Reduction of cabling volume and effort** due to 2x Harting E16 Multipin Outs
- **Minimization of failure impact on the event.** Due to separate protection of each Out channel against overload
- **High quality of component and assembly** add to high reliability and safety of the power distribution and the event

## Markets & Applications

- Markets: LED walls, Lighting, Other
- Mobile applications: Festivals, live events
- Semi-permanent applications: Theaters, studios, fairs

## Order information

Product title	Details	Order code
CPC32-C1-H2-CB	<p>Front. LED mains monitor L1, L2, L3 (after MS); Protection (under self-closing protective windows): 1x RCCB 40/0.03A (3-pole + N) with 13x MCB C16 (3-pole + N).</p> <p>Back. In: CEE 32A 5-pin plug connector, red; Out: 2x Harting attachment socket HanE 16-pin (6 channels, assignment 1-9) with sealing cap, 3x powerCON TRUE1 built-in socket self-closing caps, cPot earth connection. Housing made of flame-retardant, impact-resistant Easylen® with leather grain; Structure similar to protection class II, IP44, stacking rails at the top, foot runners, folding handles on the side. Dimensions (WTH): approx. 395 x 295 x 405mm</p>	1028846

## Technical Information

Product	
Input device	1x CEE32A 5P red
Output device	2x Harting E16 6ch [1-9] (12 RCCBs) 3x PowerCON TRUE1 TOP 1x cPot
Main switch	-
Power meter	-

Electrical	
Circuit protection	1x RCCB (3-pole + N), 13x MCB (1-pole)
Phase control indicator	L1, L2, L3, green
Rated voltage	415V/AC, 50Hz
Rated Current	In: 32A

Mechanical	
Type of construction	Stackable
Dimensions	ca. 395 x 295 x 270 mm

Material	
Housing	Easylen®
Color	black

## Environmental

<b>Protection class</b>	IP44 with CEE and cPot connector in mated condition
<b>Temperature range</b>	5 °C to +40 °C